

Part No. 902001

SKYLORD LED BAR 20"




SKYLORD LED BAR 20"

WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS

With over 15,800 actual lumens and a 780-meter reach in Xperience mode, the 20" Skylord sets a new standard for performance. The E-mode is E-approved R148/R149 with a reference number of 2x20.

[Read more](#)

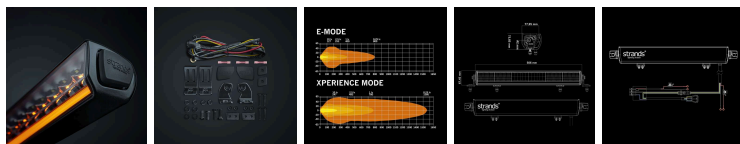



Voltage (DC)	10-32 V DC	Material housing/chassi	Aluminium
Consumption	170 W	Material lens	Polycarbonate
Functions	Amber Pos., White pos., Xperience mode, E-approved mode, Hello function	Length	506 mm
Consumption specific function	X-mode 170W, E-mode 74W, White pos. 12W, Amber pos. 12W	Depth	78 mm
Actual lumen	15800 lm	Height	67.5 mm
1 lux @	780 m	Height including bracket	73.9 mm
Color temperature	5700 K	IP-class	IP68/69K
Beam pattern	Long-distance beam	Operating temperature	-35 · +60 °C
Connection	Cable	E-approved	Yes
Cable length	2500 mm	ECE approval	R10.06, R148, R149
Color lens	Clear	Reference number	20 x 2
Color LED's	White Amber		