

Part No. 902002

SKYLORD LED BAR 30"




SKYLORD LED BAR 30"

WHITE / AMBER POS. | BUILT-IN RELAY | HARNESS

Delivering over 26,000 actual lumens and a 1,000-meter reach in Xperience mode, the 30" Skylord sets a new standard for LED bars.

[Read more](#)

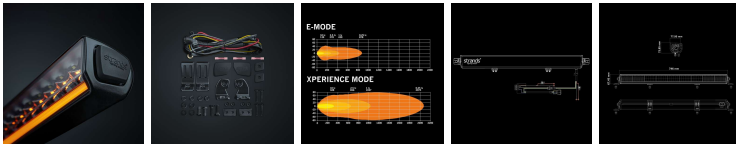



Voltage (DC)	10-32 V DC	Material housing/chassi	Aluminium
Consumption	276 W	Material lens	Polycarbonate
Functions	Amber Pos., White pos., Xperience mode, E-approved mode, Hello function	Length	746 mm
Consumption specific function	X-mode 276W, E-mode 84W, White pos. 12.5W, Amber pos. 12.5W	Depth	78 mm
Actual lumen	26000 lm	Height	67.5 mm
1 lux @	1037 m	Height including bracket	73.9 mm
Color temperature	5700 K	IP-class	IP68/69K
Beam pattern	Long-distance beam	Operating temperature	-35 - +60 °C
Connection	Cable	E-approved	Yes
Cable length	2500 mm	ECE approval	R10.06, R148, R149
Color lens	Clear	Reference number	20 x 2
Color LED's	White Amber		